

PANZERI

Broadway

24V DC

XP24801.200.0099

● white




Data sheet

CODE	XP24801.200.0099
SYSTEM POWER CONSUMPTION	max 17W/m
LIGHT SOURCE	LED
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
DRIVER	remote not included
WEIGHT	0,27 Kg
PROTECTION DEGREE	IP40
PACKING DIMENSIONS	214,0 x 4,0 x 4,0 cm
L (mm)	2000
L (in)	78 4/5"



Modular profile for ceiling or wall installation for interiors, with direct light emission.
Extruded aluminium structure in white powder paint.
Extruded polycarbonate diffuser with opaline finish.
Light modules and driver to be ordered separately.
Fastening and closing accessories to be ordered separately.


Technical drawing

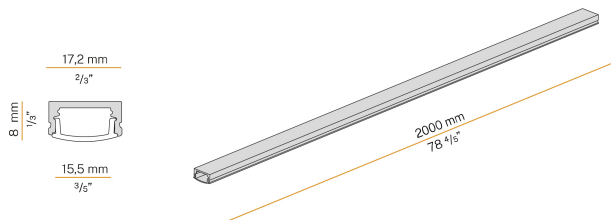

Application



Polar diagram

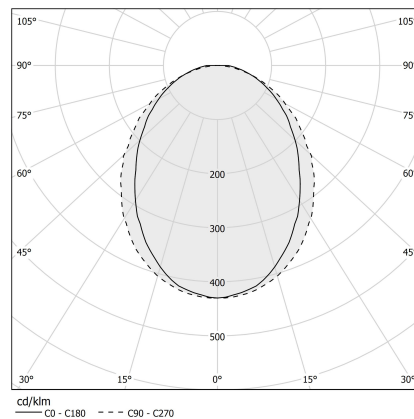

PANZERI

Broadway

Accessories / source

YLR002.017.0410

Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 3000K Ra>90 1810lm/m, to be cut each 42mm (1,7").



YLR002.017.0610

Strip LED, 5000mm (196,9") 168 LED/m 17,3W/m 24V DC 4000K Ra>90 1920lm/m, to be cut each 42mm (1,7").



YLR003.010.0410

Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 3000K Ra>90 930lm/m, to be cut each 42mm (1,7").



YLR003.010.0510

Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 2700K Ra>90 882lm/m, to be cut each 42mm (1,7").



YLR003.010.0610

Strip LED, 5000mm (196,9") 168 LED/m 9,6W/m 24V DC 4000K Ra>90 980lm/m, to be cut each 42mm (1,7").




PANZERI

Broadway

Accessories / power supply


XM6-20 UNI LED driver, 4*20W 250=700mA.




YDV.024.030.A01 LED driver, 30W 24V DC.



YDV.024.120.A01 LED driver, 120W 24V DC.



YDV.024.180.A01 LED driver, 180W 24V DC.




PANZERI

Broadway

Accessories / fixing

XM24800.201.0099

Pair of fixing clips.



PANZERI

Broadway

Accessories / closing

XM24801.202.0099

Pair of end caps.

