

# PANZERI

## Nolita Out

220-240V AC dimmable (DALI/Push DIM)

XP38E01.090.0402

● white



### Data sheet

CODE	XP38E01.090.0402
SYSTEM POWER CONSUMPTION	22,5W
EFFICACY	59,05lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	2615lm
LUMEN OUTPUT	1299lm
EFFICIENCY	49,7%
WEIGHT	1,61 Kg
PROTECTION DEGREE	IP40
SHOCK RESISTANCE RATING	IK08
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	14,5 x 142,5 x 14,5 cm
L (mm)	891
L (in)	35 1/9"



Modular profile for suspended or ceiling installation for interiors, with direct light emission.

Extruded aluminium structure in RAL 9003 white powder paint.

Reflector retaining spring clips in stainless steel.


Aluminium reflector in RAL 9003 white polyacrylic paint.

Equipped with light modules and dimmable driver.

Extruded polycarbonate diffuser with opaline finish or micro-prismatic to be ordered separately.

Connection, fastening, joining and closing accessories to be ordered separately.

### Technical drawing

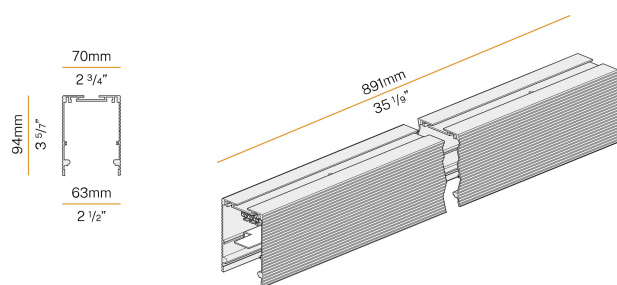

### Application



### Polar diagram

