

Sid


700mA DC  
XR17002.020.1715

black




Data sheet

|                          |                     |
|--------------------------|---------------------|
| CODE                     | XR17002.020.1715    |
| SYSTEM POWER CONSUMPTION | 2,1W                |
| EFFICACY                 | 72lm/W              |
| LIGHT SOURCE             | LED                 |
| COLOUR TEMPERATURE       | 2700K Ra>90         |
| LIGHT DISTRIBUTION       | flood               |
| BEAM ANGLE               | 25°                 |
| POWER SUPPLY             | 700mA DC            |
| DRIVER                   | remote not included |
| NOMINAL LUMINOUS FLUX    | 210lm               |
| LUMEN OUTPUT             | 144lm               |
| EFFICIENCY               | 68,6%               |
| WEIGHT                   | 0,03 Kg             |
| PROTECTION DEGREE        | IP20                |
| COLOUR TOLLERANCES       | SDCM <3             |
| PACKING DIMENSIONS       | 0,0 x 0,0 x 0,0 cm  |



Lighting fixture for ceiling built-in installation for interiors, with recessed direct light emission source.  
Built-in structure for permanent false ceilings, with die-cast aluminium body and thin external frame in white or black powder paint.  
Available in 2700K and 3000K version.  
Stainless steel spring clips for false ceiling fixing.  
Equipped with 0,4m (15,7") long power cable.  
Built-in hole dimension: Ø 18mm (Ø 0,7").


Technical drawing

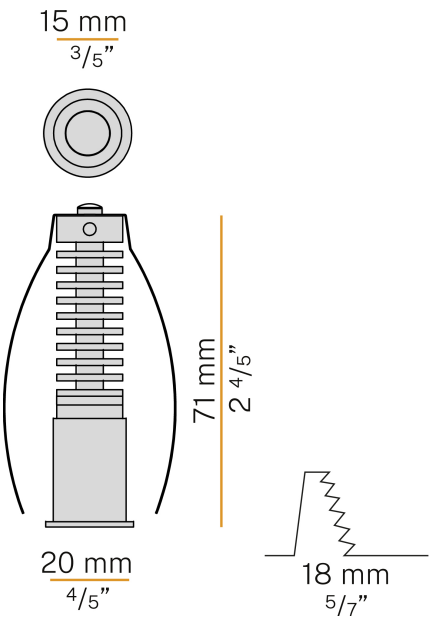

Application




Polar diagram

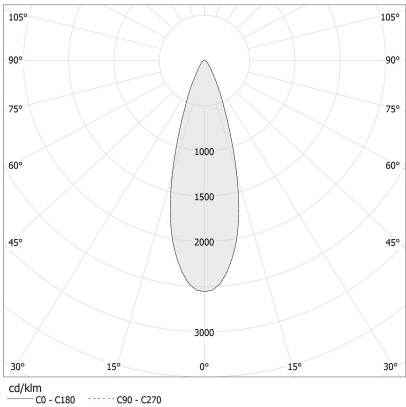

Accessories / power supply

YDA.070.012.A01 LED driver, 12W 700mA.



YDR.090.013.A02 LED driver, 13W 600÷900mA, DALI/Push DIM dimmable.

