

PANZERI

Sid


700mA DC
XR17002.020.2515

● black




Data sheet

CODE	XR17002.020.2515
SYSTEM POWER CONSUMPTION	2,1W
EFFICACY	72lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	flood
BEAM ANGLE	25°
POWER SUPPLY	700mA DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	210lm
LUMEN OUTPUT	144lm
EFFICIENCY	68,6%
WEIGHT	0,03 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM <3
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Lighting fixture for ceiling built-in installation for interiors, with recessed direct light emission source.
Built-in structure for permanent false ceilings, with die-cast aluminium body and thin external frame in white or black powder paint.
Available in 2700K and 3000K version.
Stainless steel spring clips for false ceiling fixing.
Equipped with 0,4m (15,7") long power cable.
Built-in hole dimension: Ø 18mm (Ø 0,7").


Technical drawing

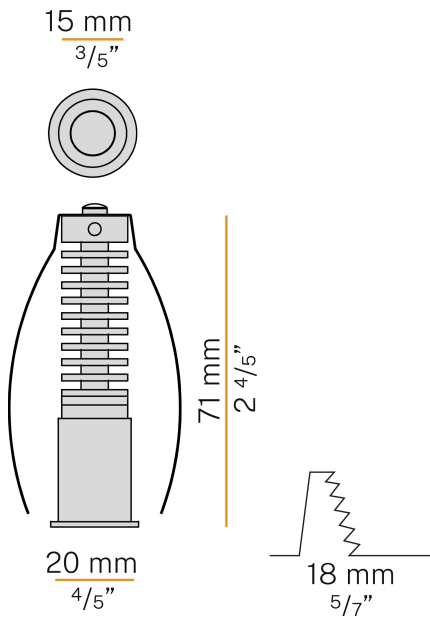

Application



Polar diagram

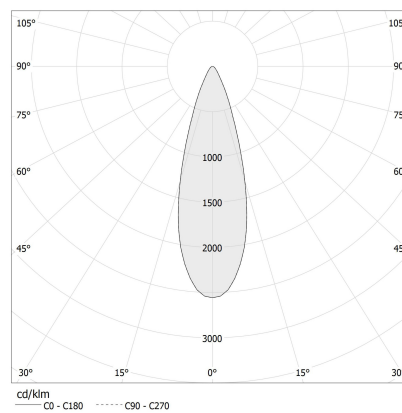


PANZERI

Sid

Accessories / power supply

YDA.070.012.A01

LED driver, 12W 700mA.



YDR.090.013.A02

LED driver, 13W 600÷900mA, DALI/Push DIM dimmable.

