

PANZERI

Nick

700mA DC
XR22501.050.1715

● white



Data sheet

CODE	XR22501.050.1715
SYSTEM POWER CONSUMPTION	6,5W
EFFICACY	72.33lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 50.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	flood
BEAM ANGLE	26°
POWER SUPPLY	700mA DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	650lm
LUMEN OUTPUT	434lm
EFFICIENCY	66.8%
WEIGHT	0,09 Kg
PROTECTION DEGREE	IP65 IP20
SHOCK RESISTANCE RATING	IK08
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	7,5 x 7,5 x 8,0 cm



Lighting fixture for ceiling built-in installation for interiors or exteriors, with direct light emission.

Built-in structure for permanent false ceilings, in die-cast aluminium in white powder paint.

Reflector in thermoplastic material with chrome plated finish.

Silicone gasket.

Diffuser in thermoplastic material with mat finish.


Anti-glare snoot in black thermoplastic material.

Stainless steel spring clips for false ceiling fixing.

Equipped with 0,4m (15,7") long power cable.

Built-in hole dimension: Ø 43mm (Ø 1,7")

Technical drawing

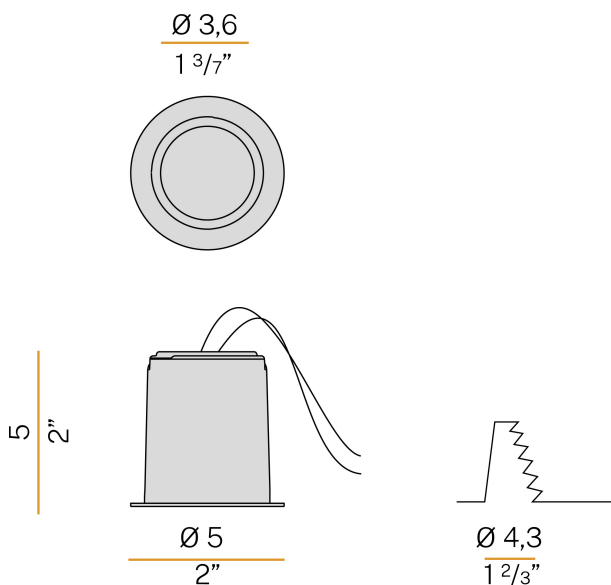

Application



Polar diagram

