

# PANZERI

## Nick

500mA DC  
XR25401.040.1715

white



### Data sheet

CODE	XR25401.040.1715
SYSTEM POWER CONSUMPTION	3W
EFFICACY	51lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 50.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	flood
BEAM ANGLE	30°
POWER SUPPLY	500mA DC
DRIVER	remote not included
LUMEN OUTPUT	153lm
WEIGHT	0,07 Kg
PROTECTION DEGREE	IP43
SHOCK RESISTANCE RATING	IK07
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	7,5 x 7,5 x 8,0 cm



Lighting fixture for ceiling built-in installation for interiors, with direct light emission. Built-in structure for permanent false ceilings, in die-cast aluminium in white powder paint.

Textured glass screen.


Anti-glare snoot in black thermoplastic material.

Stainless steel spring clips for false ceiling fixing.

Equipped with 0,3m (11,8") long power cable.

Built-in hole dimension:  $\varnothing$  36mm ( $\varnothing$  1,4")

### Technical drawing

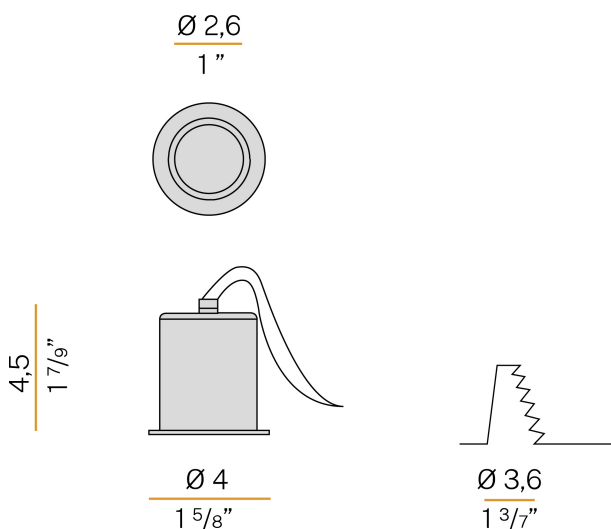

### Application



### Polar diagram

