PANZERI

Nick

250/350mA DC
XR26201.060.1715

white

DIRECT LIGHT

Data sheet

CODE	XR26201.060.1715
SYSTEM POWER CONSUMPTION	9W/12W
EFFICACY	67.67lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L80 (B10) 50.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	flood
BEAM ANGLE	38°
POWER SUPPLY	250/350mA DC
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	1050lm/1430lm
LUMEN OUTPUT	609lm/830lm
EFFICIENCY	58%
WEIGHT	0,29 Kg
PROTECTION DEGREE	IP43
SHOCK RESISTANCE RATING	IK08
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	12,0 x 16,0 x 10,5 cm



Lighting fixture for ceiling built-in installation for interiors, with direct light emission.
Built-in structure for permanent false ceilings, in die-cast aluminium in white powder paint.
Reflector in thermoplastic material with chrome plated finish.
Closing screen in transparent UV-resistant thermoplastic material.
Anti-glare snoot in black thermoplastic material.
Stainless steel spring clips for false ceiling fixing.
Equipped with 0,4m (15,7") long power cable.
Built-in hole dimension: Ø 64mm (Ø 2,5")

Technical drawing

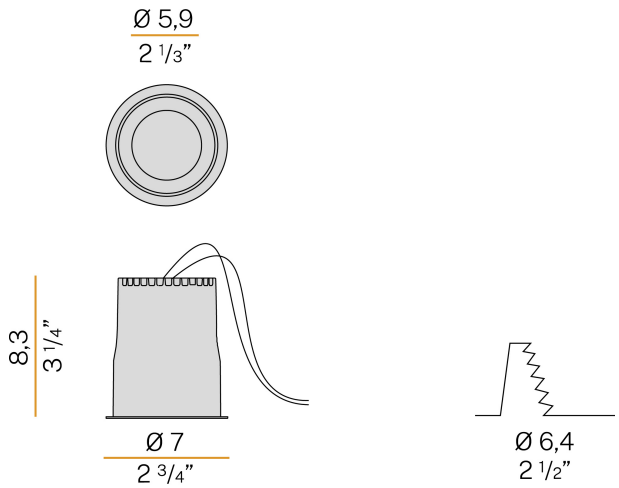

Application

Polar diagram

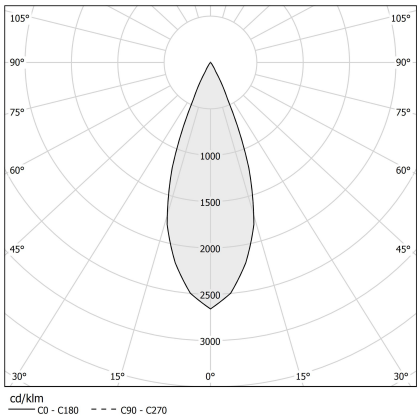

PANZERI

Nick

Accessories / power supply

XM6-20 D/P MULTI

LED driver, 9,2÷28W 200÷900mA, 1-10V/DALI/Push DIM dimmable.



XM6-20 UNI

LED driver, 4÷20W 250÷700mA.



XM6-25 D/P MULTI

LED driver, 11÷25,6W 200÷900mA, DALI/Push DIM dimmable.



PANZERI

Nick

Accessories / diffusion

XMR5

Spot optic.



XMR6

Flood optic.



XMR9

Internal satin gold cylinder.