

# PANZERI

## Jackie

220-240V AC dimmable (Step DIM)

CA07730.000.0409

 titanium




### Data sheet

|                          |                       |
|--------------------------|-----------------------|
| CODE                     | CA07730.000.0409      |
| SYSTEM POWER CONSUMPTION | 10W                   |
| EFFICACY                 | 70.6lm/W              |
| LIGHT SOURCE             | LED                   |
| LIGHT SOURCE LIFETIME    | L90 (B10) 50.000h     |
| COLOUR TEMPERATURE       | 3000K Ra>90           |
| LIGHT DISTRIBUTION       | adjustable            |
| BEAM ANGLE               | 90°                   |
| POWER SUPPLY             | 220-240V AC           |
| FREQUENCY                | 50/60Hz               |
| ELECTRICAL CONFIGURATION | dimmable (Step DIM)   |
| DRIVER                   | integrated included   |
| NOMINAL LUMINOUS FLUX    | 884lm                 |
| LUMEN OUTPUT             | 706lm                 |
| EFFICIENCY               | 79.9%                 |
| WEIGHT                   | 0,84 Kg               |
| PROTECTION DEGREE        | IP40                  |
| COLOUR TOLLERANCES       | SDCM 3                |
| PACKING DIMENSIONS       | 6,0 x 119,0 x 25,0 cm |



Wall lighting fixture for interiors, with swivelling light beam.  
 Pickled sheet metal wall bracket in polyacrylic paint.  
 Extruded aluminium frame in white, black, red or titanium polyacrylic paint.  
 Die-cast aluminium joints in polyacrylic paint.  
 Steel wire rope slings.  
 Die-cast aluminium head rotating on two axes in polyacrylic paint.  
 Modelled acrylic diffuser with mat finish and double serigraphy.  
 Push-button to adjust luminosity according to 5 levels of visual comfort.  
 Equipped with a 1,6m (63") long power cable with jack connector and adapter plug.

### Technical drawing

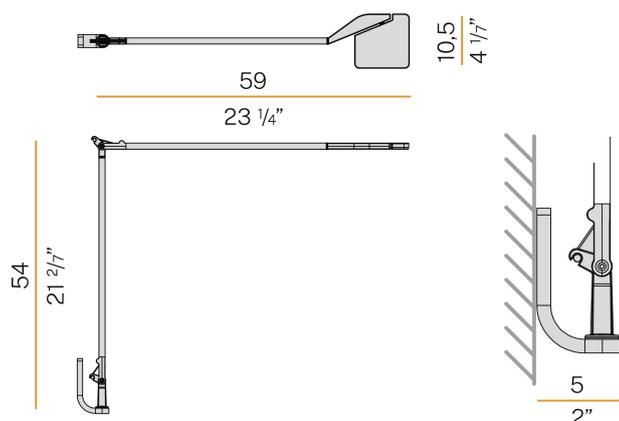

### Polar diagram

