

Street 5

48V DC dimmable (DALI)
B42301.005.1719

white




Data sheet

CODE	B42301.005.1719
SYSTEM POWER CONSUMPTION	8,4W
EFFICACY	73.75lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	adjustable
BEAM ANGLE	24°
POWER SUPPLY	48V DC
ELECTRICAL CONFIGURATION	dimmable (DALI)
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	695lm
LUMEN OUTPUT	590lm
EFFICIENCY	84.9%
WEIGHT	0,33 Kg
PROTECTION DEGREE	IP20
PACKING DIMENSIONS	0,0 x 0,0 x 0,0 cm



Lighting fixture for electrified track for interiors, with swivelling light beam.
Die-cast aluminium joint and double-axes rotating structure.
Thermoplastic anti-glare snoot and medium-beam lens.
Equipped with electric and mechanical adapter for 48V low voltage electrified tracks.
Available in 2700K and 3000K version, in white, black, mat brass, bronze and titanium finishes, with with black arm and back cover.

Technical drawing

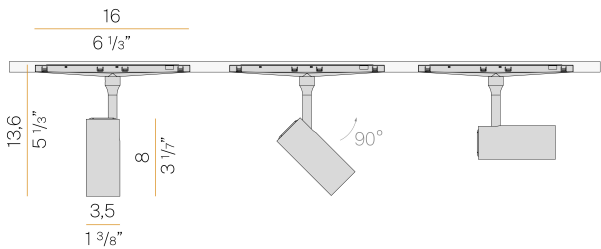

Application



Polar diagram

Street 5

Accessories / electrified tracks

9600-1/B-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, black, 2000mm (78,7") long.	
   		
9600-1/B-ST5	Recessed 48V DC DALI electrified track, 2000mm (78,7") long.	
   		
9600-1/J-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, white, black interior, 2000mm (78,7") long.	
   		
9600-2/B-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, black, 2000mm (78,7") long.	
   		
9600-2/B-ST5	Recessed 48V DC DALI electrified track, 2000mm (78,7") long.	
   		
9600-2/J-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, white, black interior, 2000mm (78,7") long.	
   		
9600-3/B-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, black, 2000mm (78,7") long.	
   		
9600-3/B-ST5	Recessed 48V DC DALI electrified track, 2000mm (78,7") long.	
   		
9600-3/J-ST1	Suspended or ceiling-mounted 48V DC DALI electrified track, white, black interior, 2000mm (78,7") long.	
   		

PANZERI

Street 5

Accessories / electrified tracks

9600-R05-90/B-ST1

90° curve for suspended or ceiling-mounted 48V DC DALI electrified track, black, 500mm (19.7") radius.



9600-R05-90/J-ST1

90° curve for suspended or ceiling-mounted 48V DC DALI electrified track, white, black interior, 500mm (19.7") radius.



PANZERI

Street 5

Accessories / electrified tracks / power supply


YBE41902.DV1

Integrated 50W on/off power supply for electrified 48V track, with 2 additional cables for DALI feed-through wiring, black.




YDV.048.075.A01

LED driver, 75W 48V DC, on/off.



YDV.048.150.A01

LED driver, 150W 48V DC, on/off.



PANZERI

Street 5

Accessories / electrified tracks / power supply and closing

9601-E/B Head power supply for 48V DC DALI electrified track, black.



9601-E/W Head power supply for 48V DC DALI electrified track, white.



9601-S/B Integrated head power supply for 48V DC DALI electrified track, with 2500mm long power cable, black.



Street 5

Accessories / electrified tracks / closing

9604/ST1-B End cap for 48V DC electrified track, black.



9604/ST1-W End cap for 48V DC electrified track, white.



9604/ST5-B End cap for recessed 48V DC electrified track.



S-9600/B-E-3000 Aesthetic cover for recessed 48V DC electrified track, lenght 3000mm (118,1"), black.



S-9600/B-E1-3000 Aesthetic cover for 48V DC electrified track, lenght 3000mm (118,1"), black.



Accessories / electrified tracks / fixing

YKS41900.01

Suspension kit with 2000mm (78,7") long steel wire and regulator, for electrified track, one every 450mm.



Street 5

Accessories / electrified tracks / junction

9603/B Linear electrified joint for 48V DC DALI track, black.



9605-O/B L-shaped junction cover for ceiling-mounted 48V DC electrified track, black.



9605-O/W L-shaped junction cover for ceiling-mounted 48V DC electrified track, white.



9605-V/B L-shaped junction cover for wall-ceiling corner for ceiling-mounted 48V DC electrified track, black.



9605-V/W L-shaped junction cover for wall-ceiling corner for ceiling-mounted 48V DC electrified track, white.



9611/B Electrified "L" joint for 48V DC DALI track, black.



9618-S/B Flexible electrified joint for 48V DC DALI track, black.



YRS.B048.A16

Repeater device for opto-isolating the data bus, for 48V DC DALI electrified track.

