

PANZERI

Bella

220-240V AC ON-OFF
L05201.011.0401

● white



Data sheet


| | |
|--------------------------|-----------------------|
| CODE | L05201.011.0401 |
| SYSTEM POWER CONSUMPTION | 6,5W |
| EFFICACY | 64.67lm/W |
| LIGHT SOURCE | LED |
| LIGHT SOURCE LIFETIME | L80 (B10) 70.000h |
| COLOUR TEMPERATURE | 3000K Ra>90 |
| LIGHT DISTRIBUTION | diffused |
| POWER SUPPLY | 220-240V AC |
| FREQUENCY | 50/60Hz |
| ELECTRICAL CONFIGURATION | ON-OFF |
| DRIVER | integrated included |
| NOMINAL LUMINOUS FLUX | 460lm |
| LUMEN OUTPUT | 388lm |
| EFFICIENCY | 84.3% |
| WEIGHT | 0,55 Kg |
| PROTECTION DEGREE | IP40 |
| COLOUR TOLLERANCES | SDCM 3 |
| PACKING DIMENSIONS | 13,0 x 24,0 x 12,0 cm |



Suspension lighting fixture for interiors, with direct light emission.
Die-cast aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.
Modelled acrylic diffuser with mat finish.
Aluminium closing disk in polyacrylic paint.
Suspension kit with rod in brass tube in polyacrylic paint.
3m (118,1") long suspension and coaxial power cable in transparent PVC.
Power canopy with pickled sheet metal ceiling bracket and extruded aluminium covering in white, black, bronze, mat brass or titanium polyacrylic paint.



Technical drawing

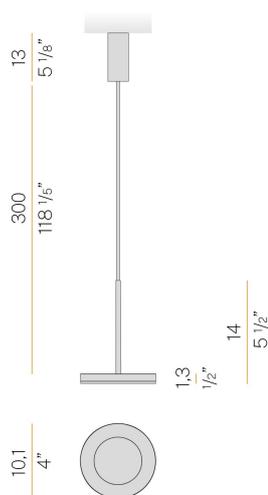

Polar diagram

