

Nolita Trim

220-240V AC ON-OFF
XG23901.060.0401




Data sheet

CODE	XG23901.060.0401
SYSTEM POWER CONSUMPTION	24,5W
EFFICACY	54lm/W
LIGHT SOURCE	LED
COLOUR TEMPERATURE	3000K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	2608lm
LUMEN OUTPUT	1296lm
EFFICIENCY	49.7%
WEIGHT	1,82 Kg
PROTECTION DEGREE	IP40 IP20
SHOCK RESISTANCE RATING	IK08
GLOW WIRE TEST PERFORMANCE	850°
PACKING DIMENSIONS	14,5 x 64,5 x 14,5 cm
L (mm)	591
L (in)	23 2/7"
ADVISED BRACKETS	2
HOLE (mm)	596 x 75
HOLE (in)	23 1/2" x 3"



Modular profile for ceiling or wall built-in installation for interiors, with direct light emission.
Built-in structure in plasterboard, in extruded aluminium in RAL 9003 white powder paint.
Reflector retaining spring clips in stainless steel.
Aluminium reflector in RAL 9003 white polyacrylic paint.
Equipped with light modules and driver.
Extruded polycarbonate diffuser with opaline finish or micro-prismatic to be ordered separately.
Fastening, joining and closing accessories to be ordered separately.
Built-in hole dimension: 596x75mm (23,5x3")

Technical drawing

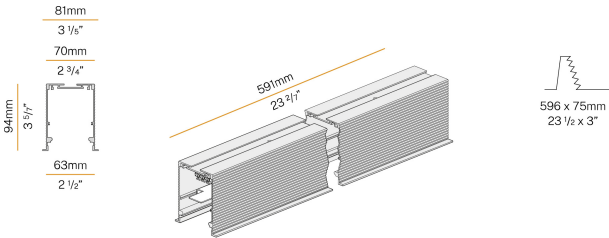

Application



Polar diagram

